# **NRC7292** EVK

## IEEE 802.11ah Wi-Fi Module Evaluation Kit



IEEE 802.11ah is a new Wi-Fi standard operating in the Sub 1GHz license-exempt band, offering longer range and lower power connectivity necessary for internet of things (IoT) applications. NRC7292 EVK facilitates evaluation and software development around NRC7292 Wi-Fi module. NRC7292 module contains external RF front end module (FEM) which can increase transmission power up to 23 dBm. On-board serial flash can be used for OTA software development and with internal 32KB cache memory, it can support execution in place (XIP) feature.

With the dual embedded ARM Cortex-M0 and Cortex-M3 processor, NRC7292 module can be used either as a standalone or a slave to a host processor via serial peripheral interface (SPI) or universal asynchronous receiver transmitter (UART) interface. In addition, it can support both AP and STA roles.



Module


**Features** 

- IFFF 802.11ah<sup>™</sup>-2016
- 1/2/4 MHz channel bandwidth support
- WPA2 PSK support
- Both AP and STA role support
- -109 dBm maximum receive sensitivity
- 750 ~ 950 MHz frequency band
- 150 Kbps ~ 15 Mbps data rate
- UART and SPI support for host interface

 $\sim$ 

 $\widehat{}$ 32MHz 32.768KHz

• +23 dBm transmit power

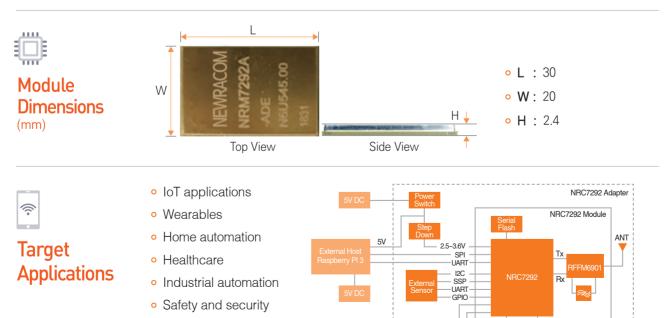

- Smart grid
- Multimedia streaming

# NEWRACOM



- IEEE 802.11ah Wi-Fi SoC solution
- Micro-USB type B connector for serial interface
- 20-Pin header connector for JTAG interface
- 40-Pin header connector for Raspberry PI 3 Model B interface

- DIP switch for Wi-Fi module configuration
- SMA female connector for ANT



# NRC7292

# IEEE 802.11ah Wi-Fi Solution + MCU SoC



As an optimized Wi-Fi solution for internet of things (IoT) devices, NRC7292 is industry's first system on a chip (SoC) that is compliant with the IEEE 802.11ah standard. Operating in the Sub 1GHz license-exempt band, it offers a much greater range over 2.4GHz and 5GHz technologies. 1/2/4MHz channel widths with optional short guard interval (SGI) yield 150 Kbps to 15 Mbps PHY throughput which can support low-rate sensor to high-rate surveillance camera application. The protocol's power-saving mechanisms like a longer sleep time greatly reduces power consumption and hence increase battery life.

The self-contained IEEE 802.11ah Wi-Fi networking capabilities with fully integrated radio transceiver of NRC7292 offers the ideal solution to add Wi-Fi connectivity to IoT products. It minimizes the PCB size, requires minimal external circuitries, and enables fast time-to-market.

The RF transceiver is a complete radio front-end optimized for Sub 1GHz band and it has fully integrated pre-power amplifiers as well as the capability to support various commercial external




NEWRACON NRC7292

integrated pre-power amplifiers as well as the capability to support various commercial external FEM device. With the dual embedded ARM Cortex-M0 and Cortex-M3 processor, NRC7292 can be used either as a standalone device or a slave to a host processor via serial peripheral interface (SPI) or universal asynchronous receiver transmitter (UART) interface. In addition, it can support both AP and STA roles.



### Target Applications

- IoT applications
- Wearables
- Home automation
- Healthcare
- Industrial automation
- Safety and security
- Smart grid
- Multimedia streaming

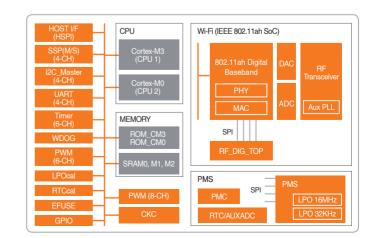

# NEWRACOM

# **Specification**

#### CPU

- ARM Cortex-M3 for Application
- ARM Cortex-M0 for WLAN
- Mailbox for communication

#### Memory

- 32KB Boot ROM for MO
- 32KB Boot ROM for M3
- 752KB System SRAM
- XIP with cache (2 ways, 32KB)

#### **Communication Peripherals**

- GPIO X 54
- SPI X 4
- UART X 4
- □ 12C X 4
- 9-bit ADC X 4

#### Complies with IEEE 802.11ah<sup>™</sup>-2016

- Fully Integrated on-chip 11ah modem, RF transceiver, processor, and memory
- Support 1/2/4 MHz bandwidth
- Up to 15 Mbps data rate
- Travelling pilot for Doppler spread
- Low power mode operation
  - Legacy
  - WMM-PS
  - TWT
- AES-CCMP security
- Dedicated SPI and UART interface for host
- Various peripheral interfaces for sensor device
- Manufacturing tools for configuration and test
- Diagnostic and DUT test tools for indoor and outdoor test

### NEWRACOM

I 25361 Commercentre Drive Suite 200 Lake Forest, CA 92630, USA

#### **RF Transceiver**

- Single-ended RF ports
- Frequency band: 750 to 950MHz

- Linear TX output power: 0dBm
- TX gain range: 30dB
- RX noise figure: <4dB</p>
- Max. input level: -10dBm
- 10bits ADC and DAC

**言話 03-3258-5531 FAX 03-3258-0433** -0011 大阪府大阪市淀川区西中島5-6-9新大阪第一ビル5階 16-6309-3243 FAX 06-6309-3257







